


156030

PIXLIP®

GO LIGHTBOX 11196

Data sheet

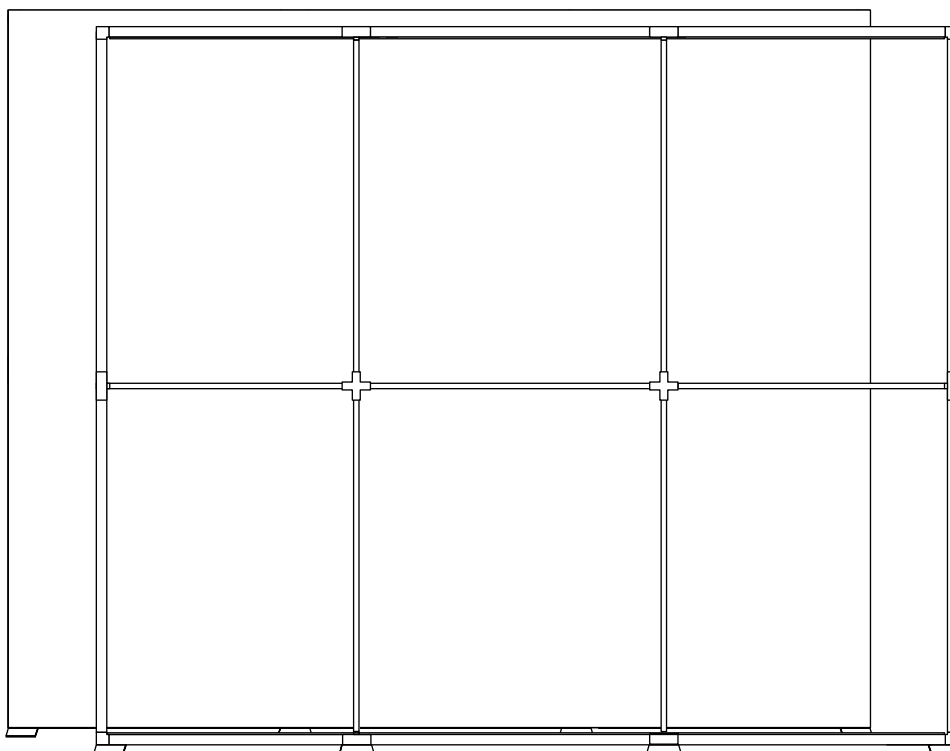

Product dimensions
111" × 96" × 5.9"

Luminous flux
16800 lm

Packaging dimensions
Paket 1 = 47.1" × 8.1" × 15.9"
Paket 2 = 41.9" × 8.1" × 15.9"

PIXLIP GO®

www.pixlip.us

GO LIGHTBOX 11196

Product dimensions	W × H × D	111'' × 96'' × 5.9''	
Item NO.	#156030		
Package contents*	2 × Bag 2 × 29'' GO LED profile 4 × 35'' GO LED profile 4 × 44'' GO profile 4 × Corner connectors 4 × Base plate double-sided 4 × Telescopic strut 47'' 1 x Strut 33'' 2 × Strut 38'' 2 × Strut cross connector 3 × Extension cable 6 × Strut holder 1 × GO connector set 3 × Power supply unit 120 W-24 V 3 × Device plug USA 3 × GO Y cable		
Frame	Material Color Certifications	ABS plastic RAL 9010, pure white CE Certification UL Certification Fire protection class V0 UV protection	
GO LED module 29	LEDs Luminous flux Color temperature Lifespan Power Input Certifications	24 pcs / module 2400 lm / module Daylight white, approx. 7500 K ≈ 50000 h 24 W 24 V CE Certification UL Certification Fire protection class V0	
GO LED module 35	LEDs Luminous flux Color temperature Lifespan Power Input Certifications	30 pcs / module 3000 lm / module Daylight white, approx. 7500 K ≈ 50000 h 27 W 24 V CE Certification UL Certification Fire protection class V0	
GO Power Supply	Output Input Certifications	24 V, 2.5 A, 120 W Max. 110-230 V AC, 50 / 60 Hz, 1.4 A CE Certification UL Certification	
Shipping weight	Packet 1 Packet 2	34.61 lb 27.33 lb	
Packaging dimensions	Packet 1 Packet 2	47.1'' x 8.1'' x 15.9'' 41.9'' x 8.1'' x 15.9''	
* Suitable textiles	GO Light Textile GO Block textile	Print White Print White	#282013 #281013 #284013 #283013

* Textiles are not included